
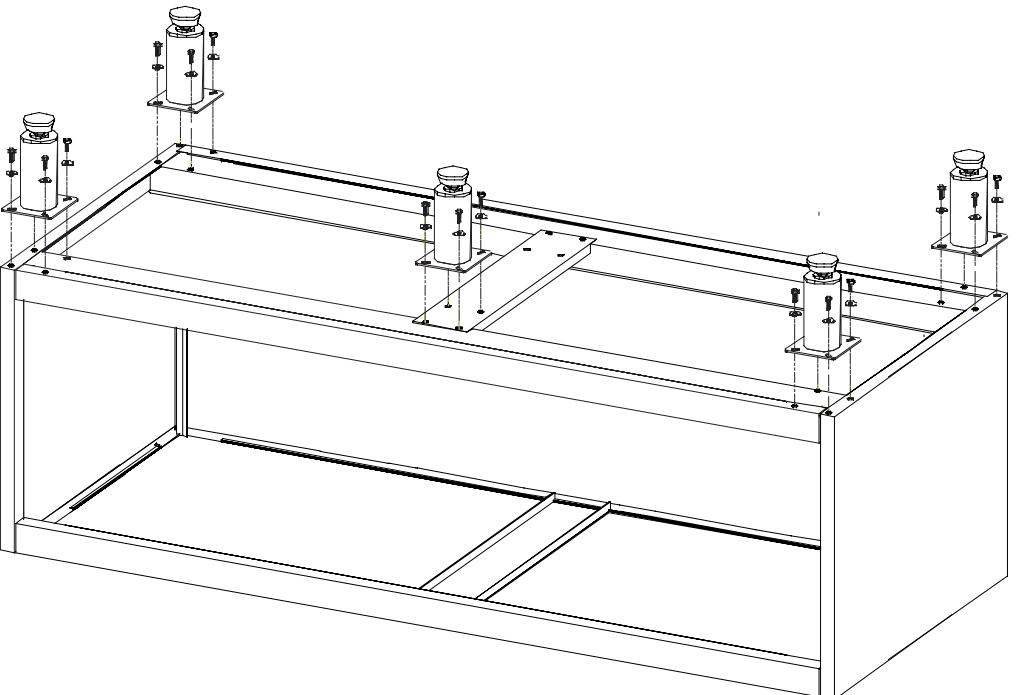


Apply the legs making match holes of lower reinforcement with holes of legs plate (like showed in the diagram below) and using the supplied screws for fixing. Repeat the operation for all the legs.

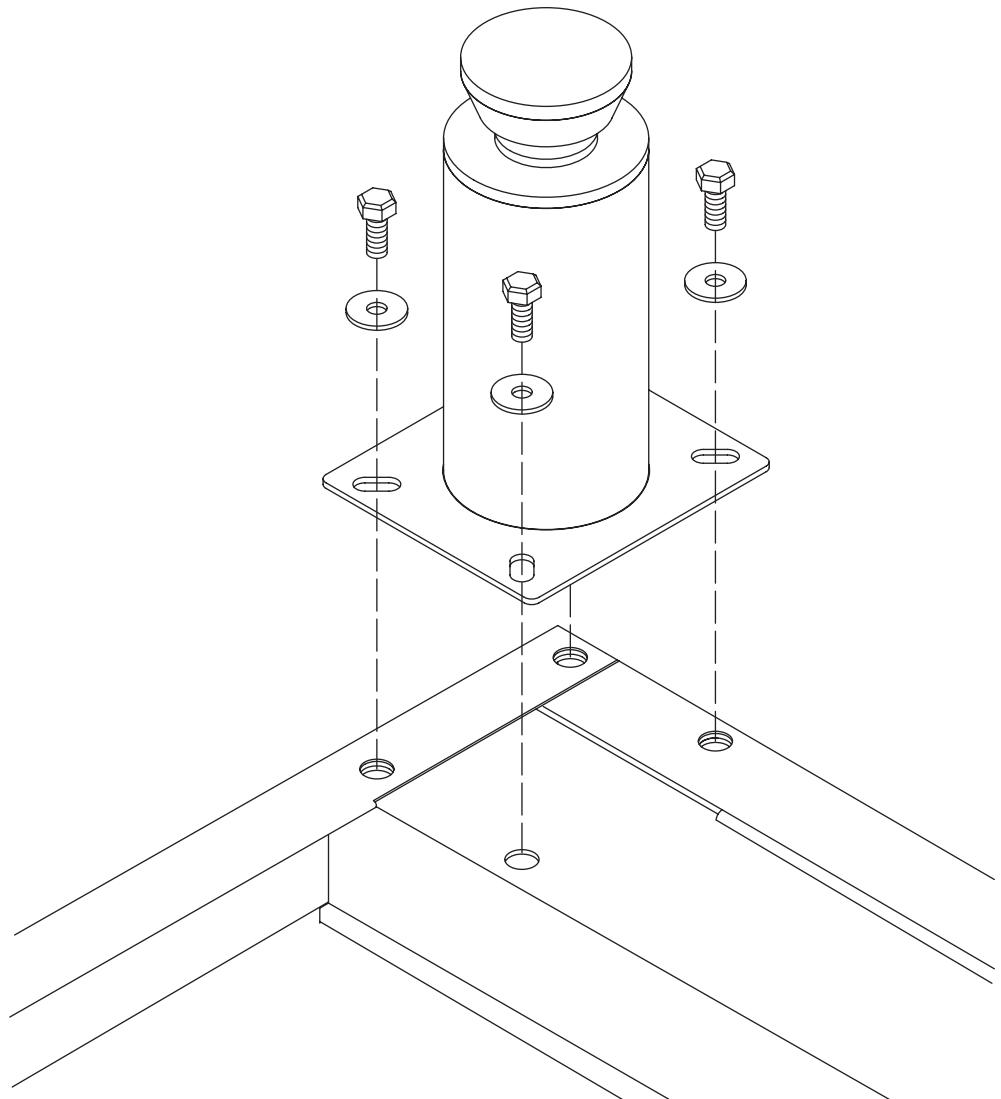

Starting from length mm. 1400 an additional lower legs is supplied.
It must be applied in the frontal part of the structure, using
holes present on the inferior central reinforcement.