




Vista laterale - GP 210 RC

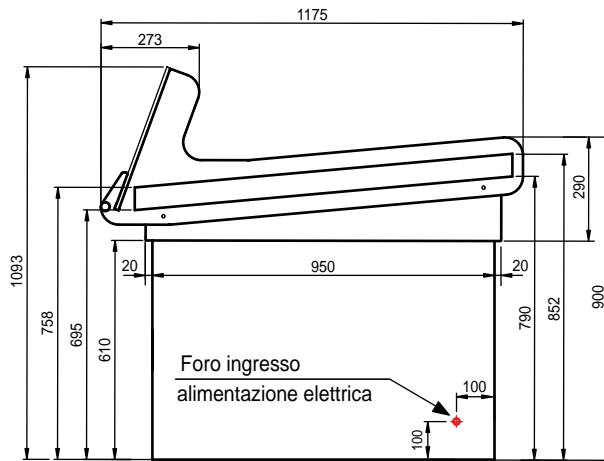

Vista laterale - GP 210 RV

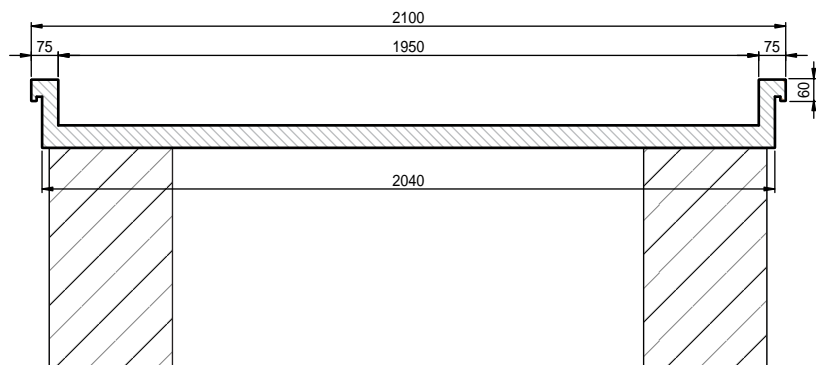


Sez. A:A

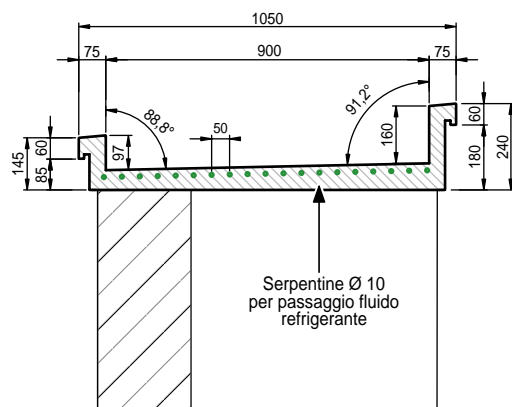


Sez. B:B


CARATTERISTICHE TECNICHE	
Dimensioni d'ingombro (mm)	2100x1175x1093h
Suprficie esposizione (m ²)	1,75
Tensione (v) Frequenza (Hz)	230 - 50
Potenza compressore (kw)	0,67
Pressione (bar)	29,5
Gas refrigerante	R404A

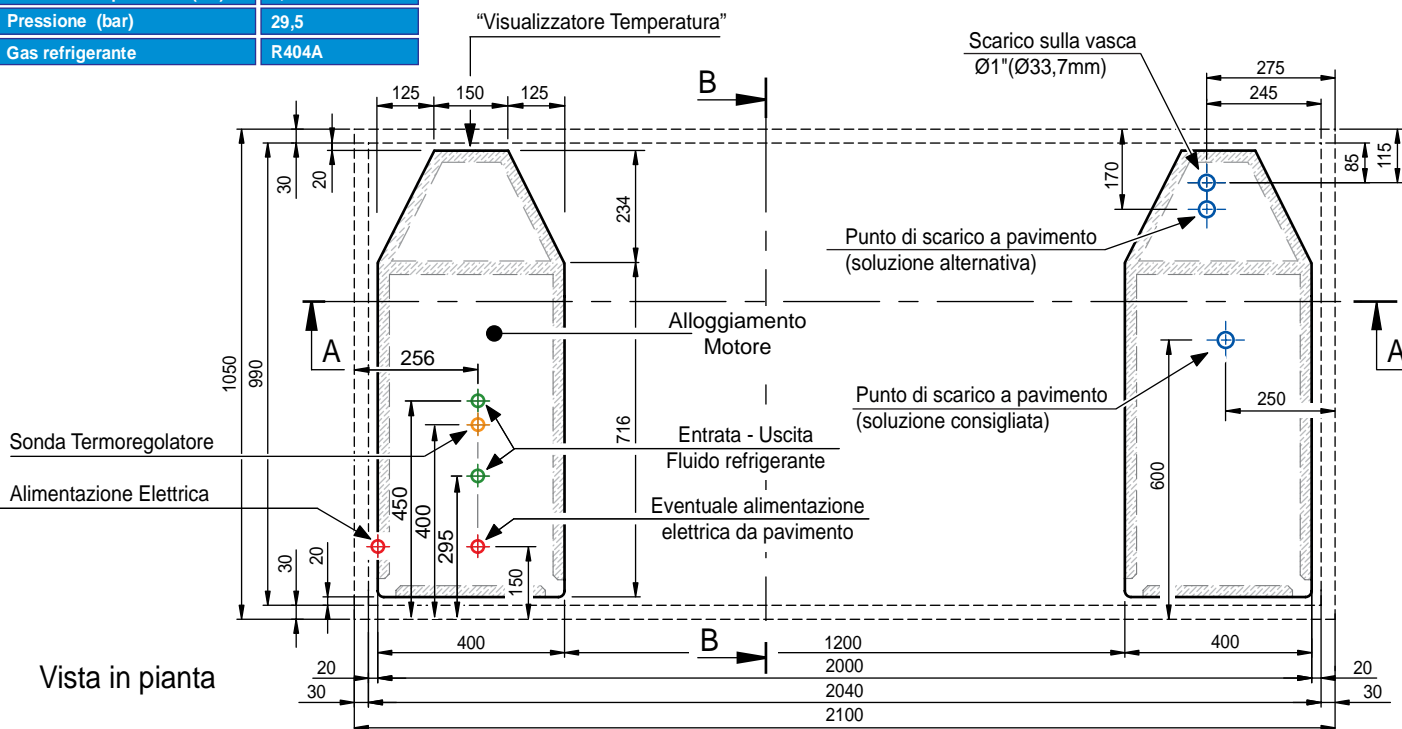


Vista in pianta

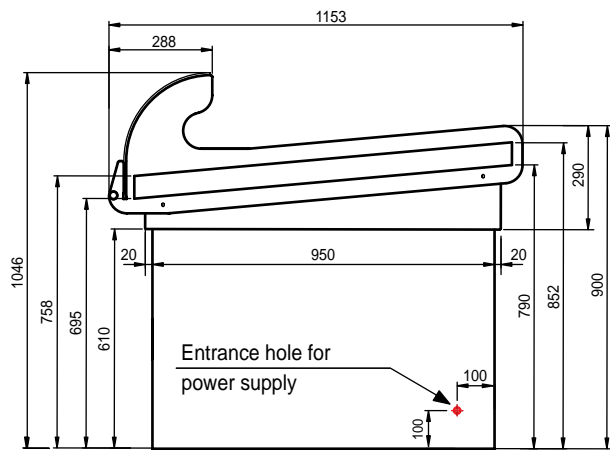


Lateral view - GP 210 RC

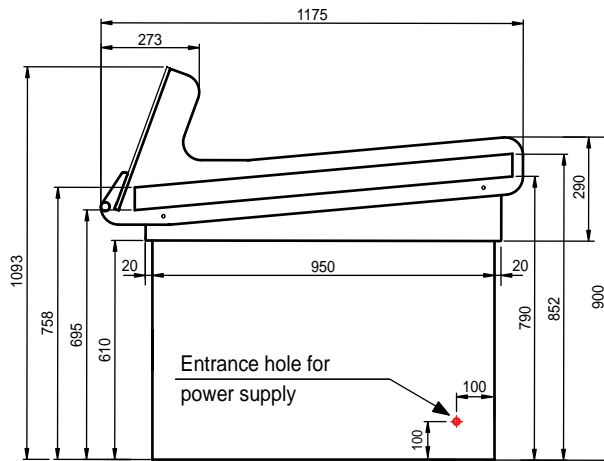

Lateral view - GP 210 RV

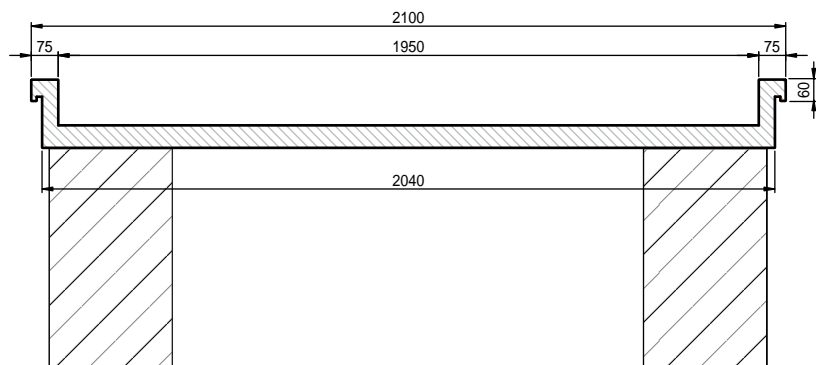


Section A:A

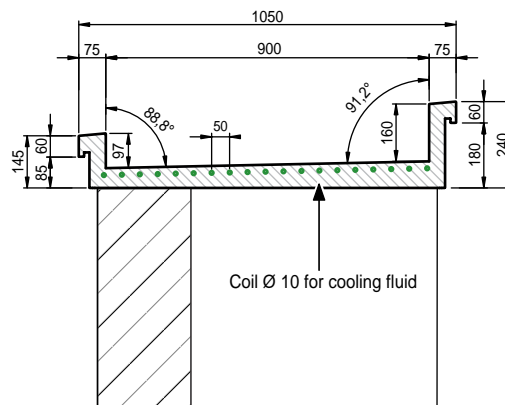

Section B:B

TECHNICAL FEATURES	
Overall dimensions (mm)	2100x1175x1093h
Surface exposure (m ²)	1,75
Tension (v) Frequency (Hz)	230 - 50
Power compressor (kw)	0,67
Pressure (bar)	29,5
Cooling gas	R404A

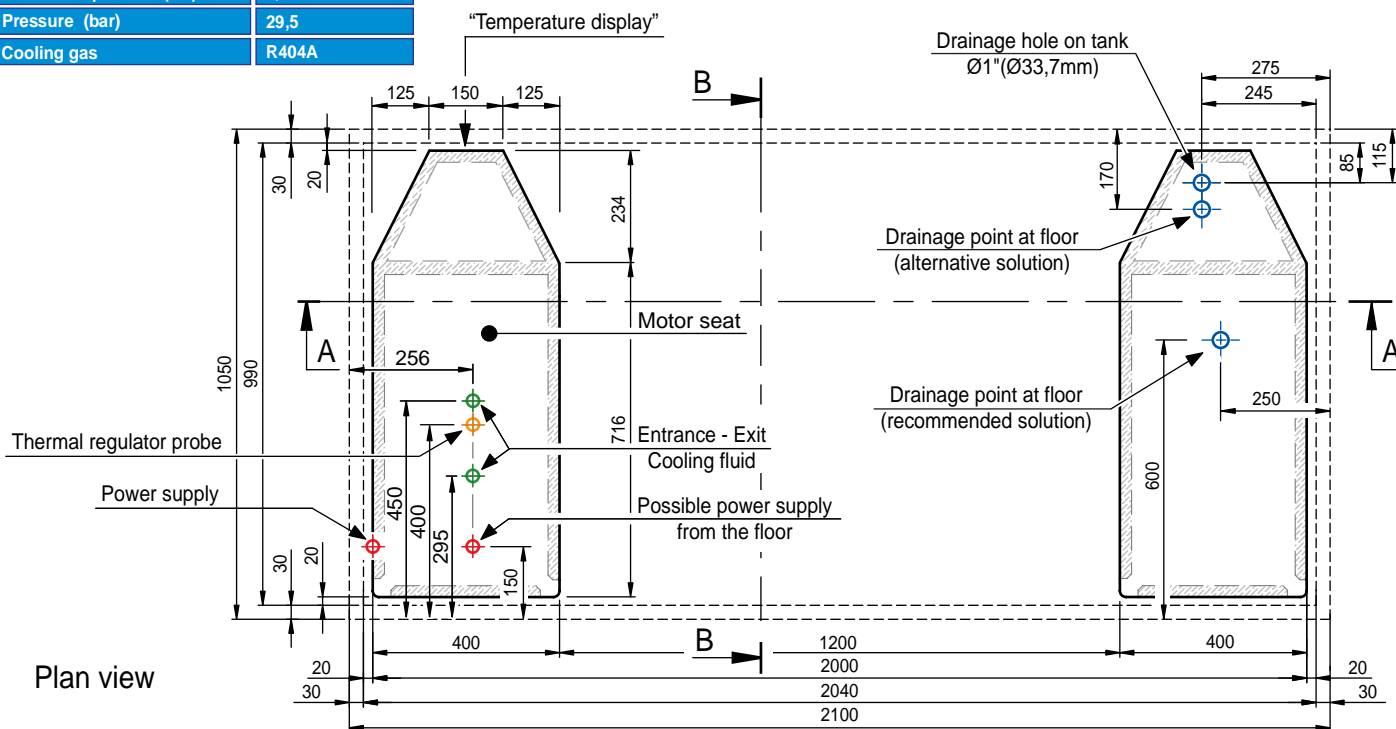

Plan view

FISH COUNTER 690 - GP 210 RC and GP 210 RV

Tank made of AISI 316 scotch-brite stainless steel with 31 mm drainage hole (3/4") supplied with internal high density polyurethane foam insulation complete with removable perforated false bottom made of stainless steel. The tank is supplied with electronic digital thermometer, with a temperature display positioned on the public side. The protection on the public side is characterized by tempered glass and by shockproof bar made of stainless steel. At the sides the tank is protected by two AISI 316 stainless steel shaped edges. The structure is composed by two AISI 304 scotch-brite stainless steel supporting legs, designed to be fixed to the floor, that can be opened to access the points of attachment and the tank drainage tube, which are completely hidden from view. The refrigerating unit is located inside of one slotted supporting leg, to allow airing and can be accessed through a closing panel that can be opened.

Issued:	09/06/2008
Update:	0
Sheet	1 of 1