


### EXAMPLES OF LAYOUTS



The shelves and part of the side are in non-toxic pre-varnished galvanised sheets in a light gray colour. The inside of each side, the cross members, and the supports are all in AISI 304 stainless steel.

Components are assembled using slots in a simple, functional and extremely quick manner. Only the side and back supports are secured with screws (two each) in order to ensure that the frame is stiff.

Once the layout of the space has been determined, the following must be established: depth of the shelving, height of the sides, type and number of shelves per section. As such, various different lengths can be used to fully optimise the space.

### COMPONENTS



27 88 ---	Sides - H mm. 1043-1473-1988-2505-2935
27 8 85--	Shelves - mm. 850xD
27 8 10--	Shelves - mm. 1000xD
27 8 11--	Shelves - mm. 1150xD
27 40 ---	Linear cross members - D mm. 200-250-300-400-500-600-700-800-1000
27 50 ---	Angular cross members - D mm. 200-250-300-400-500-600-700-800-1000




The shelves and part of the side are in non-toxic pre-varnished galvanised sheets in a light gray colour. The inside of the sides and the cross members are in AISI 304 stainless steel. The cross members have a thickness of 1.2 mm, while the sides and shelves have thickness respectively of 1.2 mm and 0.8 mm.

### FASTENINGS AND FEET



27 20 ---	Lateral reinforcement - D mm. 300-400-500-600-700-800-1000
27 30 1--	Rear reinforcement - L mm. 850 > 1000 e 1150
27 60 001	Wall mount
27 60 002	Adjustable foot

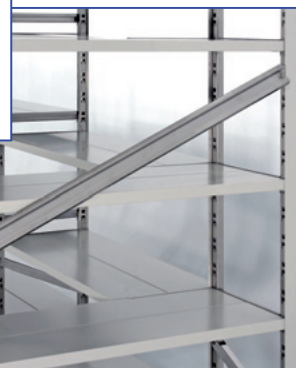

The wall fastenings have a thickness of 1.2 mm, while the supports at the sides and back are respectively 2.0 mm and 0.8 mm thick. The latter are indispensable to make the shelving self-bearing, without the need to secure the units to the wall.

### PRE-COMPOSED ELEMENTS



27 8 K1 ---	1 element - 40+L+40xDxH
27 8 K2 ---	2 elements on line - 40+L+30+L+40xDxH
27 8 K3 ---	3 elements on line - 40+L+30+L+30+L+40xDxH
27 8 KA ---	1+1 corner elements - 40+L+D+10x40+L+40xDxH
27 8 KB ---	1+2 corner elements - 40+L+D+10x40+L+30+L+40xDxH
27 8 KC ---	2+2 corner elements - 40+L+30+L+D+10x40+L+30+L+40xDxH



When calculating size, the following must be taken into account: W width of the shelf - D depth of the cross member - H height of the side. The slot joint between a linear cross member and upright improves stability with respect to the weight it carries, while the shelves are independent and can be moved, removed or added without needing to adjust any other element.

The modularity of the depth, the corner connecting systems and the three different shelf widths produced allow customers to create different combinations in order to take full advantage of any available space.